


# BMS



## THE TECHNOLOGY LEADER IN TORQUE TOOLS



### KEY FEATURES

- Easy to Use - Menu Driven
- Smart & Interchangeable
- Accuracy of better than . 5%
- Viewing Angle of 170 degrees
- Battery Life of 180+ hours
- Option to customise

Ez & Super Electronic Torque Testers



**Ez & Super  
Electronic Torque Testers**

Large Colour  
Organic LED  
Screen High Visibility  
Warning Signals

Membrane Keypad  
with LED Signals



4xAA Batteries

Interchangeable  
Connections  
for Super Range.



High Strength  
Adaptors  
Square Ratchet  
Heads


**Menu Options**

Language, Comms, Peak, Set, Recall, Upload, Clear		
Date, Track, Preset, Units	✓	✓
Display: Large Organic LED	✓	✓
Units: cNm, Nm, kgfm, kgfcm, ozins, lbins, lbft	✓	✓
Alarms: Audible & Visual Signals	✓	✓
Automatic Zero Point Setting	✓	✓
Automatic Power Down	✓	✓
Over-torque: Warning system on display	✓	✓
Interchangeable Adaptors		✓
Batteries: Lifespan of 180+ hours	✓	✓
Storage Capacity: 2000+		✓
Languages: English	✓	✓
Chinese, French, German, Italian, Japanese, Polish, Portuguese		✓
Russian, Spanish, others on request.		✓
Programmable presets: 99, via PC or directly on Wrench		✓
Electronic Calibration: by date or number of measurements		✓
Accuracy: better than .5% of actual reading LHS & RHS from 10% to 100% of specified range	✓	✓
Display of measurement: Starts from 2% of maximum	✓	✓
Window Excel & SPC compatible		✓
Comms: USB bi-directional communications	✓	✓
PLC Communications: Using ASCII or Binary transfer		✓

Ez Super

Note\* Tester can be configured to client specification

Track Mode	Preset Mode	First & Second Peak	Run Down Adaptors	Recall
Displays actual Torque as applied	Screen changes colour as Preset Torque reached	Allows user to test Mechanical click wrench accuracy	Use BMS range of RDA's with our testers to test pulse tools	Store & View 2000+ results or Upload to PC or SPC

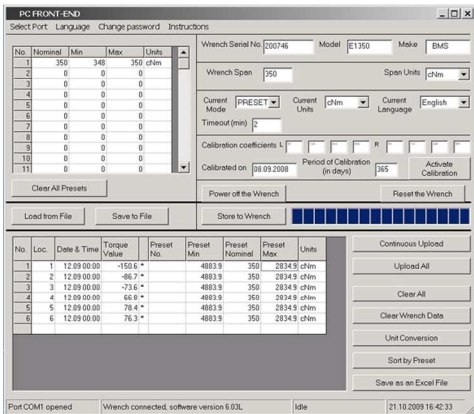

PCFE Software

Ez	Super	Drive	cNm	Nm	lbins	lbft	Height	Weight
TT0.5E	TT0.5S	1/4"	5-50	.05-.5	.44-4.4	-	72mm	.64Kg
TT002E	TT002S	1/4"	20-200	.2-2	1.7-17	-	72mm	.64Kg
TT010E	TT010S	1/4"	-	1-10	8.8-88	-	72mm	.64Kg
TT100E	TT100S	3/8"	-	10-100	-	7.3-73	90mm	1.2Kg
TT200E	TT200S	1/2"	-	20-200	-	14.7-147	105mm	1.2Kg
TT340E	TT340S	1/2"	-	34-340	-	25-250	105mm	1.2Kg
TT500E	TT500S	3/4"	-	50-500	-	37-370	105mm	1.4Kg
TT1000E	TT1000S	3/4" or 1"	-	100-1000	-	73-737	115mm	1.64Kg

Note\* Tester can be configured to have any range from 10-100%

**Run Down Adaptors - Other RDA Sizes are available on request**

063970	063971	063972	063973	063974	063978
Adaptor Unit (rundown) 1Nm	Adaptor Unit (rundown) 3Nm	Adaptor Unit (rundown) 6Nm	Adaptor Unit (rundown) 10Nm	Adaptor Unit (rundown) 30Nm	Adaptor Unit (rundown) 70Nm

